

hw-1

Retransfer Printer

CX-330



Advanced Network & Security Features


hw-engineering
GmbH & Co. KG
Im Schoenblick 24
73066 Uhingen
Germany
Tel.: +49 (0) 7163/530818
Fax: +49 (0) 7163/530817
www.hw-eng.com
email: info@hw-eng.com

hw MENA
W.L.L.
P.O. Box: 40238
Manama
Kingdom of Bahrain
Tel.: +973 16101267
Fax: +973 17910267
www.hw-eng.com
email: hwmna@hw-eng.com



Innovative Features

- Dual Interface of High Speed USB 2.0 & Ethernet (100Base-TX or 10base-T)
- IPsec Protocol (IPv4) is equipped.
- Security Erase Function for K panel *1
- Dye Diffusion UV Printing *2
- Extended Modular Options

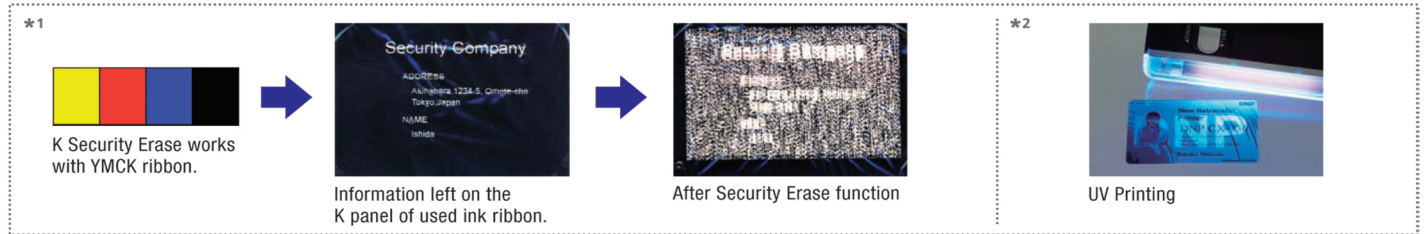


Continuing features of hw-1 Retransfer Printer


- Perfect Edge to Edge printing
- Glossy Photo Finish Quality
- Ideal for Contact chip and RFID (Contactless) desktop personalization
- Printhead free from damage by card
- Support various encode/print/laminate needs



Retransfer printing process



SMP



Card Hopper



hw-E Contactless Encoder



hw-T Turnover Unit



hw-1 Retransfer Printer



hw-L Lamination Module

● Specification

Printing Method	Dye Sublimation/Resin Thermal Retransfer
Resolution	300 dpi
Printable Area	Full-Bleed
Print Speed	29 seconds/card (YMCK with transfer)
Dual Interface	High Speed USB2.0 & Ethernet (100Base-TX, 10Base-T)
Dimension	W343 x H381 x D347mm
Weight	22kg
Signal Level	256 levels per color (YMC) 2 levels (Bk)
Hopper Capacity	300 cards (0.76mm thickness)
Stocker Capacity	100 cards (0.76mm thickness)
Ink ribbon	YMCK, YMCKK, YMCKPO, YMCKUV, Retransfer film
Options	Magnetic Stripe Encoding / IC Encoding / Contactless Encoding Lamination unit (hw-L, hw-F)
Safety Standard	UL, VCCI-B, FCC Class B, EN Class B, RoHS, CCC

*Due to policy of continuous development, we reserve the right to alter details of specification and equipment without notice.